



DATA SHEET



Insulation amplifiers, DC/DC amplifiers TDG-210DG

- Conversion of measuring signal
- Aux. voltage: 24...220 V DC



DEIF A/S · Frisenborgvej 33 · DK-7800 Skive

Tel.: +45 9614 9614 · Fax: +45 9614 9615

info@deif.com · www.deif.com

Document no.: 4921220011H

1. Data sheet

1.1 Contents	3
1.1.1 Application.....	3
1.1.2 Construction.....	3
1.1.3 Technical specifications.....	4
1.1.4 Available variants.....	4
1.1.5 Connections.....	5
1.1.6 Dimensions.....	5
1.1.7 Order specifications.....	5
1.1.8 Disclaimer.....	5

1. Data sheet

1.1 Contents

1.1.1 Application

TDG-210DG is a CE-marked DC/DC amplifier with galvanic separation between input and output. It is typically used for:

- **Converting one type of DC signal into another DC signal**

(E.g. from 4...20 mA to -10...0...10 V)

- **Separating a number of earthing points**

If a cable is connected to earth at more than one point, a measuring error may develop or noise problems may arise if the earth potentials of these vary.

- **Galvanic separation of current signals**

As measuring equipment connected to the current output of a transducer is connected in series, simultaneous earthing of more than one input of connected measuring equipment will result in short-circuit of the input of intermediate measuring units.


- **Separation of measuring circuits**

In case of remote transmission of a DC signal - typically a 4...20 mA signal to a number of measuring points situated well away from each other - separation into galvanically separated measuring circuits is often requested to isolate a possible fault and confine this to the faulty circuit.

- **Adjustment**

TDG can be ordered as a special product to meet requirement in the application such as wish of slow reaction time, "dead" measuring range or limitation of the output. Two potmeters on the front make it possible to adjust the delay (P302) from 0.5...10 sec. or 0.1...1 sec and output range from 50 % to 150 % (P303).

1.1.2 Construction

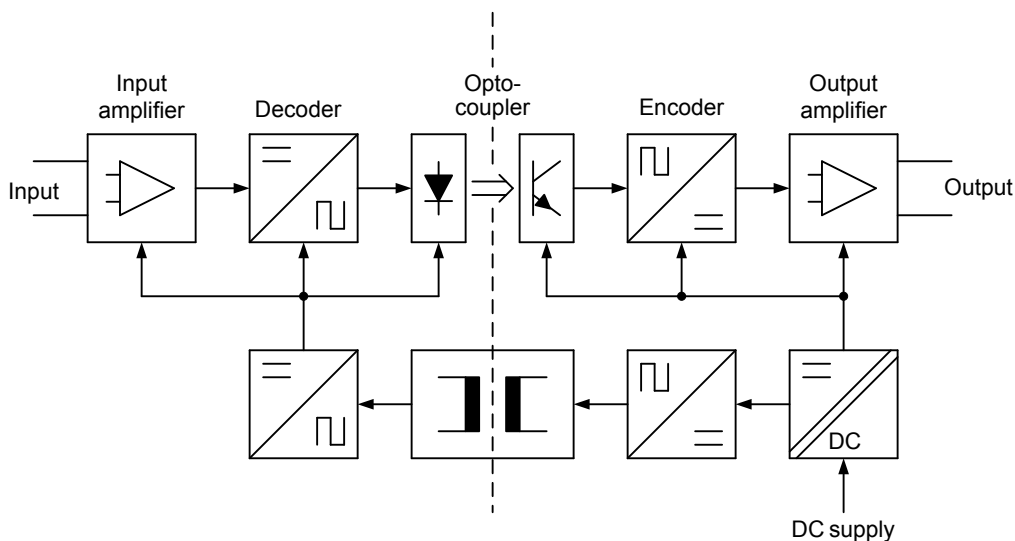

TDG-210DG requires auxiliary voltage and is fed through a 24/48/110/220 V DC inverter. The secondary voltage is rectified and fed to the encoder and output amplifier shown to the right of the galvanic interface. The input amplifier and the decoder are fed through a DC/DC inverter. The input signal is amplified and is, through optocouplers, transmitted to the output amplifier.

This measuring method combines high accuracy of measurement with long-term stability.

Standard input and output may be set by means of jumpers, whereas special input is factory-calibrated.


1.1.3 Technical specifications

Current input	4 ... 20 mA	
	Load	0...1 V voltage drop for all current inputs
Current output	Standard	0...20 mA 4...20 mA
	Load	Max. 15 V/±15 V above output
	Overload	Max. 200 % output current
	Protection	Protected against open output (max. 25 V)
Voltage output	Standard	-10...0...10 V
	Load	Max. 20 mA/±20 mA from output
	Overload	Max. 150 % output voltage
	Protection	Protected against short-circuited output (max. 45 mA)
Output (general)	Ripple	Max. 0.5 % P-P to IEC 688
	Response time	Max. <10 ms to IEC 688
	Characteristics	(See back page ¹)
Insulation	Test voltage	2500 V AC – 50 Hz - 1 min.: between input/output/aux. voltage
	Operating voltage	600 V AC – 50 Hz - 850 V DC: between input/output/aux. voltage
Auxiliary voltage	V DC -20/+30 %	24-48-110-220 V DC (2.5 W) DC/DC inverter built in
Environments	Temperature	-10...55°C (nominal) -25...70°C (operating), -40...70°C (storage)
	Climate	Class HSE to DIN 40040
	EMC	To EN 50081-1/2, EN 50082-1/2, SS4361503 (PL4), IEC 255-22-1 (class 3)
	Protection	Front: IP53. Terminals: IP20 to IEC 529
Accuracy	Input/output	Class 0.5 % (-10...15...30...55°C) to IEC 688
Drift	Temperature	Typ. 0.15 % per 10°C, max. 0.2 % per 10°C
	Load/output	Max. 0.1 % for max. variation of output load
	Auxiliary voltage	Max. 0.1 % per 10 % variation of auxiliary voltage
Connection	Screw terminals	Multi-stranded: Max. 2.5 mm ² . Single-stranded: Max. 4 mm ²
Materials	Flammability	All plastic materials self-extinguishing to UL94 (V0)

1.1.4 Available variants


Type	Variant no.	Description	Item no.	Note
TDG-210DG/2	01	Galvanic insulation DC/DC amplifier, fixed input, limited customised output, 24V DC voltage aux. supply	2962880730-02	-

1.1.5 Connections

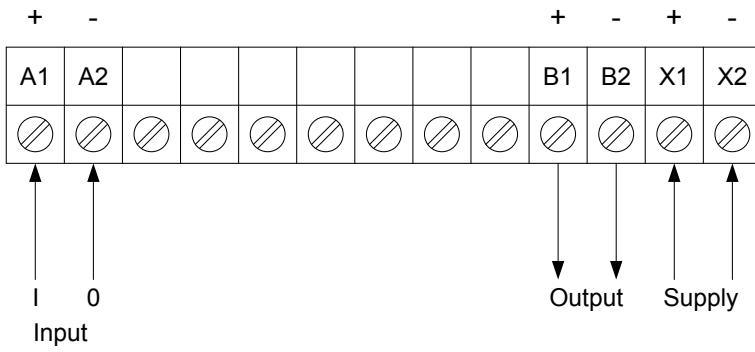

1.1.6 Dimensions

All dimensions in mm (inches)

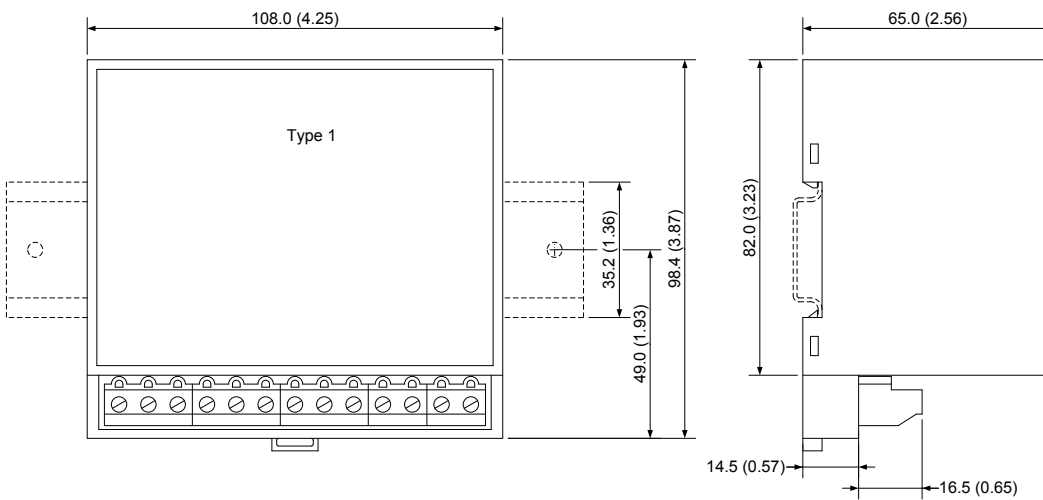

TDG-210DG: Weight: approx. 0.370 kg

1.1.7 Order specifications

Variants

Mandatory information					
Item no.	Type	Variant no.	Input	Output	Aux. voltage

Example:

Mandatory information					
Item no.	Type	Variant no.	Input	Output	Aux. voltage
2962880730-02	TDG-210DG/2	02	4...20 mA	± 10 V	24 V _{dc}

1.1.8 Disclaimer

DEIF A/S reserves the right to change any of the contents of this document without prior notice.

The English version of this document always contains the most recent and up-to-date information about the product. DEIF does not take responsibility for the accuracy of translations, and translations might not be updated at the same time as the English document. If there is a discrepancy, the English version prevails.